

# NIGRA FOR WINDOWS

## THE SPECIAL SOFTWARE FOR YOUR LEVELLINGS - NIGRA!

**Nigra for Windows** processes data from all levels - especially data, which are measured and registered with the digital levels

- Leica DNA03, DNA10, NA2000/2002/3000/3003, Sprinter 100M/150M/200M/250M
- Zeiss DiNi 10/11/12/20/21/22 (10T/11T/12T in levelling mode), 0.3 mm<sup>1</sup>, 0.7 mm
- Topcon DL-101/102/101c/102c
- SOKKIA SDL30, SDL50

Nigra includes the data transfer for the preceding listed digital levels (Leica levels NA2002/3003 since software version 3.2), editing of raw data, reformatting of raw data in the Nigra measurement file, height database or a

Point no.	Height	Cal.no.	Diff.	NC	Date	Comment	Y-coordinate	X-coordinate
1k-d0011	48.498	777777	0.0	1	07-07-1989		0.000	0.000
1k-d0012	48.516	777777	0.0	1	07-07-1989		0.000	0.000
1k-d0014	48.520	777777	0.0	1	07-07-1989		0.000	0.000
1k-d0015	48.510	777777	0.0	1	07-07-1989		0.000	0.000
2000146	51.845	999999	0.0	1	08-13-1974	most cloudy	0.000	0.000
2000147	52.656	999999	0.0	1	08-13-1974		0.000	0.000
2000148	56.476	999999	0.0	1	06-04-1974		0.000	0.000
2k-d0010	48.516	777777	0.0	1	08-08-1989	Rain, 16 C	0.000	0.000
2k-d0011	48.514	777777	0.0	1	08-08-1989		0.000	0.000
2k-d0013	48.511	777777	0.0	1	08-08-1989		0.000	0.000
2k-d0014	48.521	777777	0.0	1	08-08-1989		0.000	0.000
2k-d0015	48.516	777777	0.0	1	08-08-1989		0.000	0.000
3000146	51.845	999999	0.0	1	09-12-1974	cloudy	0.000	0.000
3000147	52.653	999999	0.0	1	09-12-1974		0.000	0.000
3000148	56.476	999999	0.0	1	09-12-1974		0.000	0.000
3k-d0010	48.518	777777	0.0	1	10-10-1989	changeable, 17 C	0.000	0.000

special profile file (profile file not for SOKKIA SDL30/50), alphanumeric header data (e.g. date, observer, order, etc.), alternative coding of header data at the measuring time, correction of the readings with mean staff meter, linear coefficient of extension and staff offset (e.g. if using staff lengthening - not for SOKKIA SDL30/50), alphanumeric point number extensions to max. 14 characters, creating the raw data for setouts.

### Additional Features:

- Manual data input
- Additional data transfer for Zeiss Dac 10 and Leica Gif10 and all devices which need no producer special transfer dialog (e.g. Zeiss

Dac E, Leica NA 2002/3003/DNA03/DNA10/Sprinter 100M/150M/200M/250M).

- **Calculations** for levellings with side shots, height differences, line adjustments and instrument checks, creation of a net file for the network adjustment **Levnet/Nivnet** inclusive calculation of standard deviation for 1 km double levelling.
- **Printer output in many different languages:** The text for outputs can be customized by the user. With this function it is possible to realize printer outputs in many languages. Files for German and English are supplied with Nigra.
- Output of calculations, movement lists and other ASCII files in **PDF** (for Acrobat Reader) or **HTML** format (the HTML format is without graphics).
- Calculations and height outputs in the **units of measurement Meters, Feet and Inches.**
- **Microsoft Access compatible height database** for a great number of points. Data fields: maximum of 14 characters for alphanumeric point number, height, X-, Y-coordinates, date, calculation number, mean value difference, remark. Output of heights as text file (ASCII standard format und **free customizing ASCII formats**), import of heights from various column formatted ASCII-files into the Nigra height file. (Via this interface it is also possible to import heights from DELTA/DOS.)
- **Internal text editor** for large files.
- **Movement measurements:** Creation of movement lists for a maximum of 9999 measurement periods directly from the height file with the following variants:
  - Reduction to point of origin, for example for the determination of the tilt behaviour of a building.
  - Reduction to a reference point or a reference height.
  - Comparison of theoretical - actual height and actual - theoretical height.

<sup>1</sup>) levelling mode VRRV will not be supported

Miller & Stanton Company  
NigraWin - Levelling, Version 3.1  
Job: Sample

12-31-2002 Page: 1

Theoretical-actual comparison  
Calculation No.: 1  
Location Sankt Augustin  
Order 12. Movement Measurement  
Line 12/95 Date 01-16-1996  
Weather sunny Observer Miller  
Level Leica NA3003 345678 Staff Nedo 5416  
Staff graduation 1 cm Reading sequence BF BF(S)  
Comments Levelling with side shots  
Calculation of Mean Values: new - calculated height is inserted

Misclosure = -4.0 mm Max. error E (3) = 4.2 mm


Distance	Back	Side	Fore	Height	Point No.
25.26	1.423			49.242	1503
15.47		2.900		47.764	1503.5
15.47		2.901		47.763	1503.5m
15.47		2.899		47.765	1503.5o
15.47		2.000		48.664	200
26.15			0.022	50.642	1504
31.59	1.262				
30.99			0.001	51.901	1505m
18.54	1.520				
12.43		-0.105		53.525	1506
18.44			2.600	50.820	1560

Sum total distances = 150.97 m Delta-H= 1.58200 m  
Sum backsight distances = 75.39 m  
Sum foresight distances = 75.58 m

### Nigra Calculation Output

## Graphic functions:

**Longitudinal** and **cross sections** creation from **levellings** and **X,Y,Z-coordinates** of tacheometric surveys. Distances and heights are placed so that they are not overwritten, even if follow each other very closely.

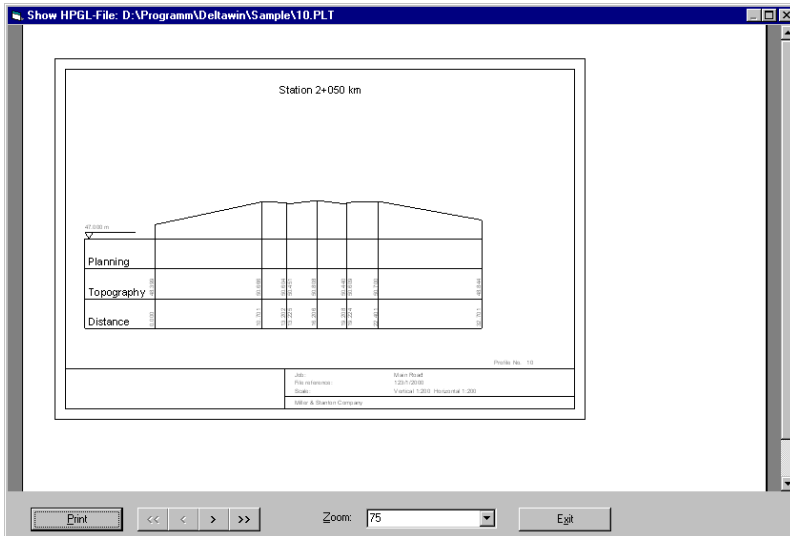

**Creation details:** Many scales for heights and distances, many paper formats, 0 - 3 decimal places for heights and distances, raising the profile base, reduction of distances to any point of profile, addition of a start distance (e.g. for longitudinal profiles), variable text for the lines *Planning*, *Topography and Distance*, calculation of profile areas. In addition to the topographic profile it is also possible to create profiles from planning heights.

Furthermore, **Nigra** allows the creation of movement plots as *time-movement curves* from the data of the heights file. The scales for the time axis and movements can be chosen, also various line types, plotter pens or layers. Several movement curves can be copied together to one output.

The graphic files are created in the **HPGL and DXF format**. So that the output to a HPGL/HPGL2 plotter and the import to most of the CAD software is guaranteed. Nigra shows the HPGL files on the screen and prints them on the Windows printer.


### • Network Adjustment Nivnet

by Prof. Dr.-Ing. Fröhlich/Sankt Augustin. The network files for Nivnet are created by Nigra from the measurement data and the heights in the Nigra height file. **The Nivnet software is only available in German Language**. Units of measurement are meters and feet.

**Calculation limits:** A maximum of 200 points (new and connecting points) and a maximum of 1000 observations (Nivnet200) or 1000 points and 3000 observations (Nivnet1000).

#### Methods:

Constrained network adjustment (principle of least squares), free network adjustment, free network adjustment with transformation. Integrated is also a network solvability, which simplifies error detection in case of net defects.

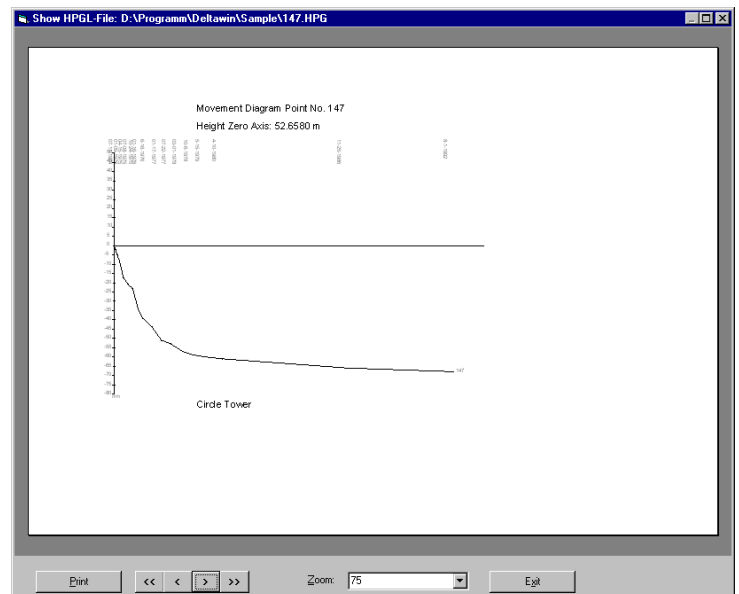

**System Requirements:** PC with Pentium processor, operating system Microsoft Windows NT 4.0/2000/XP/Vista.

Nigra comes on CD-ROM with printed short reference **Getting Started Guide**. Pricing for the first license:

Products	Euro	Order No.
Nigrawin	485,00 EUR	150002
Nigra for Leica Sprinter <sup>*)</sup>	180,00 EUR	150005
Upgrade of Delta/DOS to Nigrawin	Ask for special offer	150091
Nivnet200, only german version available	588,00 EUR	150022
Nivnet1000, only german version available	997,00 EUR	150023

EGM countries (only if the VAT ID is missing): All prices plus 19% sales tax. Shipping and handling costs are 10,00 EUR for each shipment. Changes of costs and technical equipment are reserved.

**Kurt Andrä Trukk-Soft** \* Paracelsusstraße 49 \* D-53757 Sankt Augustin \*

Fax +49/2241/315954, [mail@trukkssoft.de](mailto:mail@trukkssoft.de)

Web: <http://www.trukkssoft.de>

<sup>\*)</sup> In Nigra for Leica Sprinter the following modules are not available: Support of digital level Trimble (Zeiss), Topcon, Sokkia, Leica DNA und NA, evaluation of movements measurements, creation of profiles, creation of network files, data transfer Rec500 → PC.

## Nigra measuring data file

```

RTower Brigde
x23456789012345678901234567890123456789012345678901234567890123456789012
x      1      2      3      4      5      6      7
Distance<--- Back      Side      Fore ---><--- Point Number -->
C1
HSankt Augustin      Location
H      Location
H12. Movement Measur Order
Hement      Order
H12/95      Line
H01-16-1996      Date
Hsunny      Weather
HMiller      Observer
HLeica NA3003 345678 Level
HNedo 5416      Staff
HLevelling with side Comments
H shots      Comments
H00      2.Col.:0=Side,1=no Side,4=Line, 5=Level test
*      3.Col.:0=BF,BBFF,2=BFFB,4=BFBF,4.Col.:a=altern.
H1      Number of staff scales
H0      Scale constant for 2 staff graduation
H3      Difference tolerance between scales
H1      Staff graduation 1=cm,feet,inch, 0.5=1/2cm
H1      With distances, 1=yes, 0=no
H3      Decimal places for heights in calculations
H3      Decimal places for readings in calculations
E13m      E/Mean value/Error class/Unit of measure
D 25.26 b1.423      1503
D 15.47      s2.900      1503.5
0 15.47      s2.901      1503.5
2 15.47      s2.899      1503.5
D 15.47      s2      200
D 26.15      f0.022      1504
D 31.59 b1.262      1504
0 30.99      f.001      1505
D 18.54 b1.520      1505
D 12.43      s-.105      1506
D 18.44      f2.6      1560
E

```

## Nigra calculations output

Miller & Stanton Company  
 NigraWin - Levelling, Version 3.1 12-31-2002 Page: 1  
 Job: Sample

Tower Brigde  
 Calculation No.: 1  
 Location Sankt Augustin  
 Order 12. Movement Measurement  
 Line 12/95 Date 01-16-1996  
 Weather sunny Observer Miller  
 Level Leica NA3003 345678 Staff Nedo 5416  
 Staff graduation 1 cm Reading sequence BF BF(S)  
 Comments Levelling with side shots  
 Calculation of Mean Values: new - calculated height is inserted

Misclosure = -4.0 mm Max. error E (3) = 4.2 mm

Distance	Back	Side	Fore	Height	Point No.
25.26	1.423			49.242	1503
15.47		2.900		47.764	1503.5
15.47		2.901		47.763	1503.5m
15.47		2.899		47.765	1503.5o
15.47		2.000		48.664	200
26.15			0.022	50.642	1504
31.59	1.262				
30.99			0.001	51.901	1505m
18.54	1.520				
12.43		-0.105		53.525	1506
18.44			2.600	50.820	1560

Sum total distances = 150.97 m Delta-H= 1.58200 m  
 Sum backsight distances = 75.39 m  
 Sum foresight distances = 75.58 m